



AquaTrans™ AT600

Panometrics ultrasonic flow meter for liquids

Applications

The AquaTrans AT600 flowmeter is a complete ultrasonic system for the measurement of:

- Potable Water
- Wastewater
- Sewage
- Discharge water
- Treated water
- Cooling and heating water
- Irrigation water
- Other industrial fluids

Features & Benefits

- Economical non-intrusive flow measurement
- Extremely simple setup and installation
- Suitable for a wide range of pipe sizes and materials
- Suitable for lined pipes
- Velocity, volumetric, and totalized flow outputs
- Clamp-on installations
- Permanent solid couplant for clamp-on applications

Liquid flow ultrasonic transmitter


The AquaTrans AT600 liquid flow ultrasonic transmitter combines state-of-the-art flow measurement capability with a low-cost transmitter package that can be installed right at the process measurement point. It's designed specifically for water and wastewater applications in full pipes. The all-digital AquaTrans AT600 has no moving parts and requires minimal maintenance. An onboard microprocessor uses patented correlation transit-time™ technology for long-term, drift-free operation. Automatic adjustment to changing fluid properties and dynamically configured operating software simplify programming.

Transit-time flow measurement

In this method, two transducers serve as both ultrasonic signal generators and receivers. They are in acoustic communication with each other, meaning the second transducer can receive ultrasonic signals transmitted by the first transducer and vice versa.

In operation, each transducer functions as a transmitter, generating a specified number of acoustic pulses, and then as a receiver for an identical number of pulses. The time interval between transmission and reception of the ultrasonic signals is measured in both directions. When the liquid in the pipe is not flowing, the transit-time downstream equals the transit-time upstream. When the liquid is flowing, the transit-time downstream is less than the transit-time upstream.

The difference between the downstream and upstream transit times is proportional to the velocity of the flowing liquid, and its sign indicates the direction of flow.

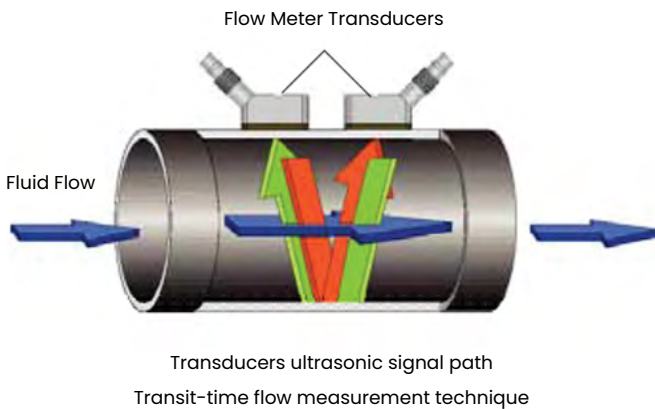


Clamp-on transducers


Clamp-on transducers offer maximum convenience, flexibility and a low installation cost compared to traditional flow metering technologies. With proper installation, clamp-on transducers provide better than 1% of reading accuracy in most applications.

Easy four step installation


Step #1: Install straps onto pipe.

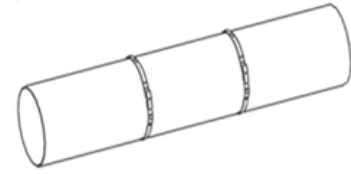


Step #2: Put clamp-on fixture on pipe and move straps onto sides of fixture.

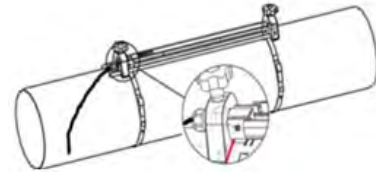

Step #3: Open fixture to set spacing.

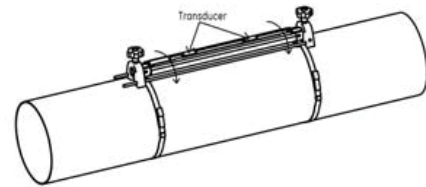


Step 4: Set spacing and lock fixture with transducers onto pipe.

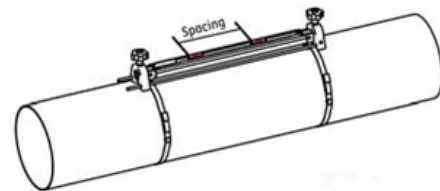

Vitality™ software (optional)

The AquaTrans AT600 can communicate with a PC via our Vitality interface program. Consult the manual for details on sites, logs, and other operations with a PC.

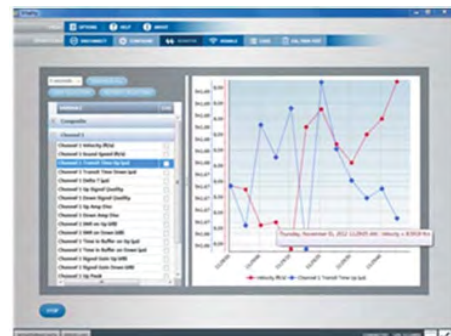

Specifications

Overall operation and performance

Fluid types

Liquids: acoustically conductive fluids, including most clean liquids, and many liquids with small amounts of entrained solids or gas bubbles.

Flow measurement

Patented Correlation Transit-Time™ mode

Pipe sizes

0.5 to 300 in. (15 to 7600 mm)

Pipe materials

All metals and most plastics. Consult Baker Hughes for concrete, composite materials, and highly corroded or lined pipes.

Accuracy

- ±1% of reading in application, ≥2 in. (50 mm) pipe and >1 ft/s (0.3 m/s) velocity
- ±2% of reading in application, <2 in. (50 mm) pipe and >1 ft/s (0.3 m/s) velocity
- ±0.5% in field calibration

Installation assumes a fully developed, symmetrical flow profile (typically 10 diameters upstream and 5 diameters downstream of straight pipe run). Final installation accuracy is a function of multiple factors including fluid, temperature range, pipe centricity and others.

Calibration

All meters are water calibrated and delivered with a traceable calibration certificate.

Repeatability

±0.2% of reading

Range (bidirectional)

-40 to 40 ft/s (-12.19 to 12.19 m/s)

Rangability (overall)

400:1

Measurement parameters

Velocity, Volumetric, and totalized flow

Electronics

Enclosure

Epoxy-coated aluminum weatherproof Type 4X/IP67

Dimensions

6.6 x 5.0 x 2.4 in. (168 x 128 x 61 mm) Weight: 3.5 lb/1.5 kg

Channels

One channel

Display

Graphic LCD (128 x 64 pixels)

Keypad

Six-button keypad for full functionality operation

Error display indicator

Green or red light

Power supplies

- Standard: 85 to 265 VAC, 50/60 Hz
- Optional: 12 to 28 VDC, ± 5%

Power consumption

10 Watts in-rush

5 Watts normal operation

Operating temperature

-4°F to 131°F (-20°C to 55°C)

Storage temperature

-40°F to 158°F (-40°C to 70°C)

Outputs (based on configuration)

- 4-20 mA (24VDC powered, 600Ω maximum load, 1500 VDC isolation)
- Frequency, pulse, alarm (Passive output, 100 VDC, 1 A/1 W maximum, 1500 VDC isolation)
- HART (FSK modulation, category flow, protocol version 7.5, device revision 2, MFG ID 157, device type code 127, number of device variables 34)
- Modbus/RS485 (Half-duplex, 1500 VDC isolation)

Note: Analog outputs are Namur NE43 compliant.

Certification

CE, UL, CSA, (MCert approval pending)

Clamp-on ultrasonic flow transducers

Temperature ranges

- Standard: -40 to 302°F (-40 to 150°C)
- Optional: -328 to 752°F (-200 to 400°C)

See specific transducer for exact temperature range.

Mounting fixture

Anodized aluminum with stainless steel strapping

Couplant

- Standard: Solid couplant
- Optional: Liquid couplant

Rating

Standard: General purpose (IP66 or IP68)

Note: See specific transducer model for exact rating.

Ordering information

A	B	C	D	E	F	G	H	I	J	K	L
AT6											
	C1										
		AT05									
		AT10									
		AT20									
		UTX40									
		CFLP									
		CR05									
		CR10									
		CR05SUB									
		CR10SUB									
		CR05JB									
		CR10JB									
		CP05JB									
		CP10JB									
		CP20JB									
			<>								
			IN								
			MM								
				1							
				2							
				3							
				4							
				7							
					1						
					2						
						A					
						H					
						M					
							AA				
							AF				
							AT				
							FF				
							FT				
							TT				
								01			
								02			
								03			
								04			
								05			
								06			
								07			
								08			
								09			
									M		
									E		
										O	
										S	
AT6	C1	AT05	5	IN	1	2	A	AA	01	M	0
											(Example part number)

Model

Clamp-on liquid ultrasonic flow meter consisting of an AT600, transducers, clamping fixture, transducer cable and coupling

Clamp-on system

Single-channel clamp-on system

Transducer system

AT05: C-AT transducers, 0.5 MHz, IP68, 12 in./300 mm or greater typ., Tprocess: -40 to 150°C
AT10: C-AT transducers, 1 MHz, IP68, 4 to 24 in./100 to 600 mm typ., Tprocess: -40 to 150°C
AT20: C-AT transducers, 2 MHz, IP68, 2 to 6 in./50 to 150 mm typ., Tprocess: -40 to 150°C
UTX40: UTXDR transducers, 4 MHz, IP67, 0.5 to 2 in./15 to 50 mm, Tprocess: -20 to 120°C
CFLP: CF-LP transducers, 4 MHz, IP66, 0.5 to 2 in./15 to 50 mm, Tprocess: -40 to 230°C
CR05: C-RS transducers, 0.5 MHz, IP66, 12 in./300 mm or greater typ., Tprocess: -40 to 150°C
CR10: C-RS transducers, 1 MHz, IP66, 4 to 24 in./100 to 600 mm typ., Tprocess: -40 to 150°C
CR05SUB: C-RS submersible transducers, 0.5 MHz, IP68, 12 in./300 mm or greater typical, Tprocess: -40 to 150°C
CR10SUB: C-RS submersible transducers, 1 MHz, IP68, 4 to 24 in./100 to 600 mm typ., Tprocess: -40 to 150°C
CR05JB: C-RS with junction box transducers, 0.5 MHz, IP66, 12 in./300 mm or greater typ., Tprocess: -40 to 150°C
CR10JB: C-RS with junction box transducers, 1 MHz, IP66, 4 to 24 in./100 to 600 mm typ., Tprocess: -40 to 150°C
CP05JB: C-PT with junction box transducers, 0.5 MHz, IP66, 12 in./300 mm or greater typ., Tprocess: -20 to 210°C
CP10JB: C-PT with junction box transducers, 1 MHz, IP66, 4 to 24 in./100 to 600 mm typ., Tprocess: -20 to 210°C
CP20JB: C-PT with junction box transducers, 2 MHz, IP66, 2 to 6 in./50 to 150 mm typ., Tprocess: -20 to 210°C

Pipe size

Nominal outside diameter

Pipe units

Inches
Millimeters

Cable length:

10 ft (3 m) of transducer cable
 25 ft (7.5 m) of transducer cable
 50 ft (15 m) of transducer cable
 100 ft (30 m) of transducer cable
 300 ft (90 m) of transducer cable

AT power:

85 to 265 VAC
 12 to 28 VDC

Analog and digital output:

4-20 mA analog output only
 4-20 mA output with HART
 4-20 mA output and Modbus

Discrete output:

Two alarm contacts
 One alarm contact and one frequency output
 One alarm contact and one totalizer (pulse) output
 Two frequency outputs
 One frequency output and one totalizer (pulse) output
 Two totalizer (pulse) outputs

Language:

English
 German
 French
 Italian
 Spanish
 Portuguese
 Russian
 Japanese
 Chinese

Default units:

Metric
 English

Special:

No specials
 Special

Panametrics, a Baker Hughes Business, provides solutions in the toughest applications and environments for moisture, oxygen, liquid and gas flow measurement. Experts in flare management, Panametrics technology also reduces flare emissions and optimizes performance.

With a reach that extends across the globe, Panametrics' critical measurement solutions and flare emissions management are enabling customers to drive efficiency and achieve carbon reduction targets across critical industries including: Oil & Gas; Energy; Healthcare; Water and Wastewater; Chemical Processing; Food & Beverage and many others.

Join the conversation and follow us on LinkedIn:
[linkedin.com/company/panametricscompany](https://www.linkedin.com/company/panametricscompany)